



FIG (PRIOR ART)

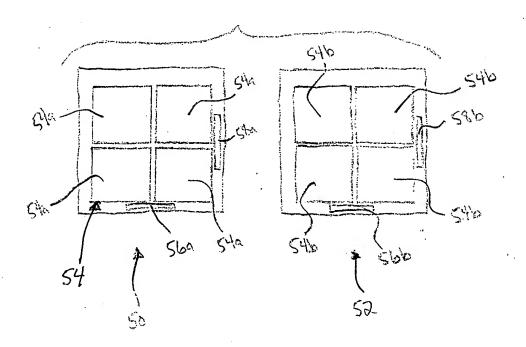

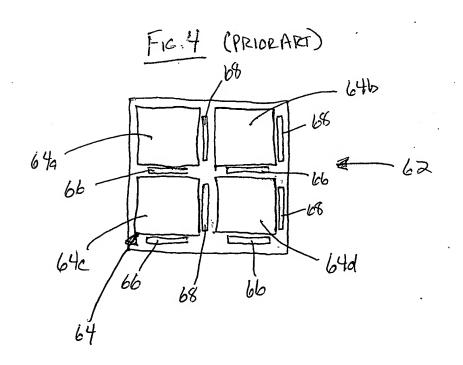


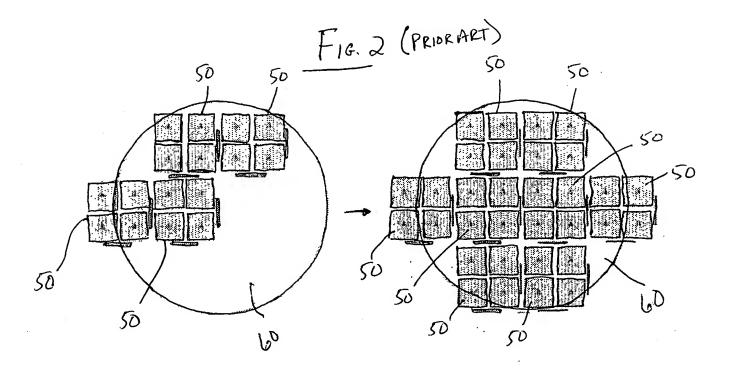

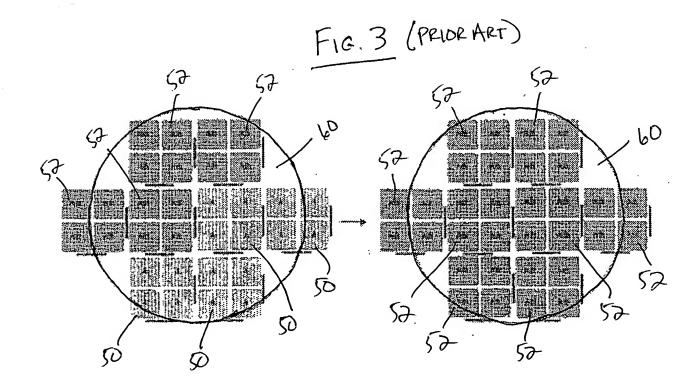


82 60 949 62 FIG. 6 (PRIVE ART) 60 60 -16.5 (PRIOR PRET) 646 42 644 64. Ý 919-

·44 °

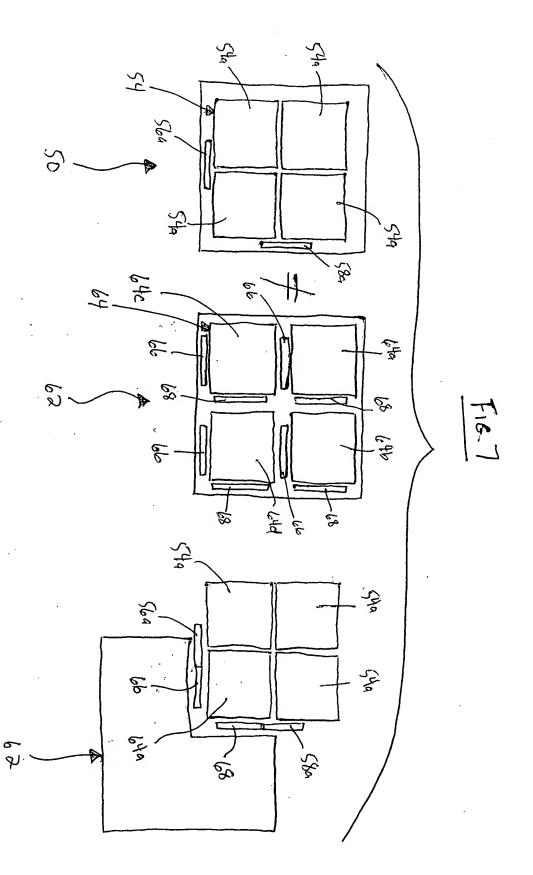

ř

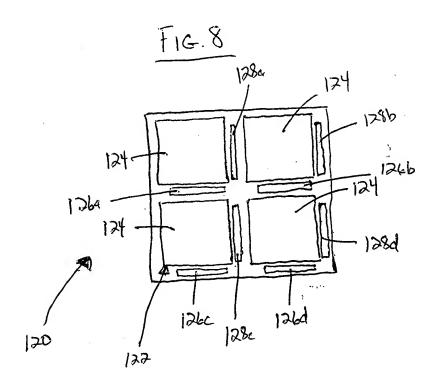

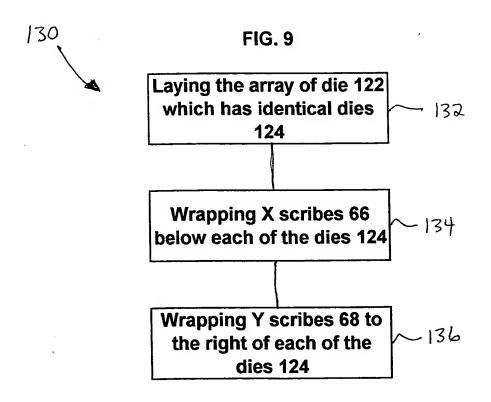


FIG. 10



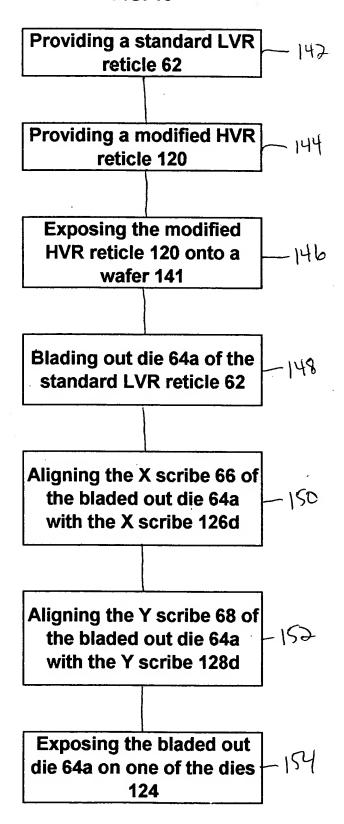


FIG. 11

260 Providing the modified HVR reticle 120 262 Providing the standard LVR reticle 62 Splitting the scribes 126a-126d and 128a-128d of the modified HVR reticle 120 in half 264 such that half of the dies 124 have scribes 232 with only N-type transistors 204 and such that half of the dies 124 have scribes 232 with only P-type transistors 206 Splitting the scribes 66 and 68 of the standard LVR reticle 62 in half such that half - 266 of the dies 64a-64d have scribes 242 with only first back-end metals 210 and such that half have scribes 242 with only second backend metals 212

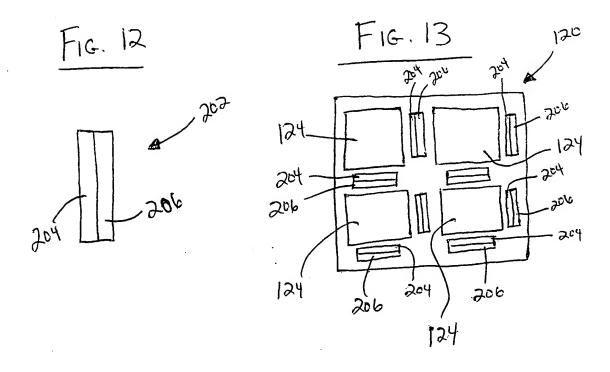

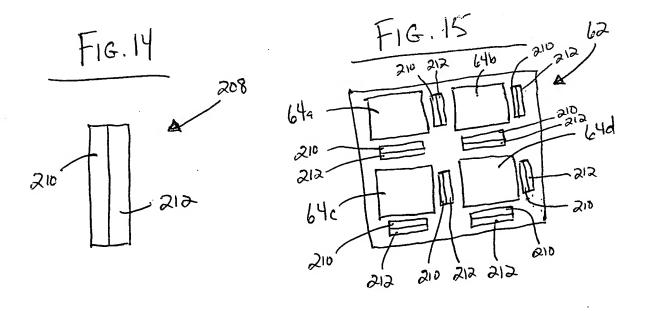

ţ

